

# GUARDIAN

FALL PROTECTION



## Product Name: Internal Shock Lanyard

Part #: 11200; 11201; 11202; 11203; 21215; 01295; 01296; 01297; 01298; 11211; 11212; 11213; 11260; 11261

## Instruction Manual

**Do not throw away these instructions!**

**Read and understand these instructions before using equipment!**

---

Introduction	1
Applicable Safety Standards	1
Worker Classifications	1
Product Specific Applications	2
Limitations	2-3
Components and Specifications	3-4
Installation and Use	4
Maintenance, Cleaning, and Storage	5
Inspection	5
Inspection Log	5
Safety Information	6
Labels	7

## Introduction

Thank you for purchasing a Guardian Fall Protection Internal Shock Lanyard. This manual must be read and understood in its entirety, and used as part of an employee training program as required by OSHA or any applicable state agency.

This and any other included instructions must be made available to the user of the equipment. The user must understand how to safely and effectively use the Internal Shock Lanyard, and all fall safety equipment used in combination with the Internal Shock Lanyard.

User Information	
Date of First Use:	<hr/>
Serial #:	<hr/>
Trainer:	<hr/>
User:	<hr/>

## Applicable Safety Standards

When used according to instruction specifications, this product meets or exceeds all applicable OSHA 1926 Subpart M, OSHA 1910, ANSI Z359.13-2009, and ANSI A10.32-2012 standards for fall protection. Applicable standards and regulations depend on the type of work being done, and also might include state regulations if applicable. Consult regulatory agencies for more information on personal fall arrest systems and associated components.

## Worker Classifications



Understand the following definitions of those who work near or who may be exposed to fall hazards.

**Qualified Person:** A person with an accredited degree or certification, and with extensive experience or sufficient professional standing, who is considered proficient in planning and reviewing the conformity of fall protection and rescue systems.

**Competent Person:** A highly trained and experienced person who is ASSIGNED BY THE EMPLOYER to be responsible for all elements of a fall safety program, including, but not limited to, its regulation, management, and application. A person who is proficient in identifying existing and predictable fall hazards, and who has the authority to stop work in order to eliminate hazards.

**Authorized Person:** A person who is assigned by their employer to work around or be subject to potential or existing fall hazards.

**It is the responsibility of a Qualified or Competent person to supervise the job site and ensure all applicable safety regulations are complied with.**

## Product Specific Applications

### WARNING

Use of equipment in unintended applications may result in serious injury or death. Maximum 1 attachment per connection point.



**Personal Fall Arrest:** Internal Shock Lanyard may be used to support a MAXIMUM 1 PFAS for use in Fall Arrest applications. Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs. Maximum free fall is 6'. Applicable D-ring: Dorsal.



**Restraint:** Internal Shock Lanyard may be used in Restraint applications. Restraint systems prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of lanyard/SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs. No free fall is permitted. Restraint systems may only be used on surfaces with slopes up to 4/12 (vertical/horizontal). Applicable D-rings: Dorsal, Chest, Side, Shoulder.



**Work Positioning:** Internal Shock Lanyard may be used in Work Positioning applications. Work Positioning systems allow a worker to be supported while in suspension and work freely with both hands. Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs. Maximum allowable free fall is 2'. Applicable D-rings: Side.



**Rescue/Confined Space:** Internal Shock Lanyard may be used in Rescue/Confined Space applications. Rescue systems function to safely recover a worker from a confined location or after exposed to a fall. There are various configurations of Rescue systems depending on the type of rescue. Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs. No free fall is permitted. Applicable D-rings: Dorsal, Chest, Shoulder.

**For all applications: worker weight capacity range (including all clothing, tools, and equipment) is 130-310 lbs.**

### WARNING


Not all Guardian Internal Shock Lanyards may be used in every application type. **ALWAYS** consider lanyard length, design, and any other structural components. Competent Person **MUST** make a determination regarding correct lanyard application and compatibility.

## Limitations

**Fall Clearance:** There must be sufficient clearance below the anchorage connector to arrest a fall before the user strikes the ground or an obstruction. When calculating fall clearance, account for a MINIMUM 3' safety factor, deceleration distance, user height, length of lanyard/SRL, and all other applicable factors.

**Diagram shown is an example fall clearance calculation ONLY.**

**Swing Falls:** Prior to installation or use, make considerations for eliminating or minimizing all swing fall hazards. Swing falls occur when the anchor is not directly above the location where a fall occurs. Always work as close to in line with the anchor point as possible. Swing falls significantly increase the likelihood of serious injury or death in the event of a fall.

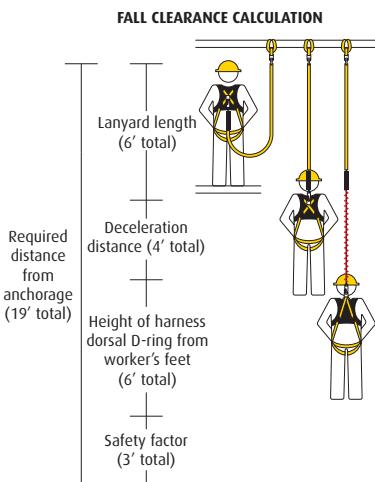

**Compatibility:** When making connections with Internal Shock Lanyard, eliminate all possibility of roll-out. Roll-out occurs when interference between a hook and the attachment point causes the hook gate to unintentionally open and release. All connections must be selected and deemed compatible with Internal Shock Lanyard by a Competent Person. All connector gates must be self-closing and self-locking, and withstand minimum loads of 3,600 lbs. See the following for examples of compatible/incompatible connections:


Connector closed and locked to D-ring. **OK.**



Two connectors to same D-ring. **NO.**



Incompatible or irregular application, which may increase risk of roll-out. **NO.**



Two or more snap hooks or carabiners connected to each other. **NO.**



Connector to integral lanyard. **NO.**



Connector directly to webbing. **NO.**



Connector directly to horizontal lifeline. **NO.**



## Components and Specifications

Materials (made from some or all of the following): polyester, nylon, galvanized steel, and aluminum.

Webbing width: 1".



Single Leg



Double Leg

Part #	Length	Description
11200	6'	Single Leg
11201	6'	Single Leg w/Rebar Hook
11202	6'	Double Leg
11203	6'	Double Leg w/Rebar Hooks
21215	6'	Double Leg w/Aluminum Rebar Hooks
01295	4½' - 6'	Stretch Lanyard, Single Leg
01296	4½' - 6'	Stretch Lanyard, Double Leg
01297	4½' - 6'	Stretch Lanyard, Single Leg w/Rebar Hook
01298	4½' - 6'	Stretch Lanyard, Double Leg w/Rebar Hook
11211	4½' - 6'	Stretch Lanyard, Single Leg w/Black Web
11212	4½' - 6'	Stretch Lanyard, Double Leg w/Black Web & Rebar Hook Ends
11213	4½' - 6'	Stretch Lanyard, Single Leg w/Black Web & Rebar Hook End
11260	6'	Surfacetech Web, Single Leg
11261	6'	Surfacetech Web, Double Leg w/Rebar Hook Ends

## Installation and Use

1. Prior to use, inspect Guardian Internal Shock Lanyards and all PFAS equipment to be used in combination with Internal Shock Lanyards.
2. Ensure that all connectors and all other components of the PFAS are compatible with Guardian Internal Shock Lanyards, and are selected by a Competent Person. The selected safety harness **MUST** be of proper size, and **MUST** be fitted snugly, but still allow for a full range of movement.
3. Make considerations for eliminating or minimizing swing fall hazards.
4. Ensure structure to which the anchorage connector is attached is capable of withstanding a **MINIMUM** load relative to the application in which the Internal Shock Lanyard is to be used.
5. Attach lanyard snap hook or rebar hook to compatible harness D-ring or structural anchor. For lanyards with two, integrally connected legs, only attach the central snap hook to the applicable harness D-ring.
6. Attach remaining snap hook or carabiner end of lanyard to compatible anchorage connector. Rebar Hooks **MUST ONLY** be connected to structural rebar. Ensure that all connectors are self-closing and self-locking, and that there is no risk of roll-out. **ALWAYS** maintain 100% tie-off.
7. NEVER work with employed harness D-ring positioned above the anchorage connector, unless permitted by specific application or combination of equipment. A Competent Person must make a determination regarding the acceptability of working above an anchorage connector.
8. Only use Guardian Lanyards in the fall protection application(s) for which they are designed. Refer to product labeling, or contact Guardian Fall Protection if unsure of proper application(s).

## Maintenance, Cleaning, and Storage

If an Internal Shock Lanyard fails inspection in any way, immediately remove it from service, and contact Guardian to inquire about its return or repair.

Cleaning after use is important for maintaining the safety and longevity of Internal Shock Lanyard. Remove all dirt, corrosives, and contaminants from Internal Shock Lanyard before and after each use. If an Internal Shock Lanyard cannot be cleaned with plain water, use mild soap and water, then rinse and wipe dry. NEVER clean Internal Shock Lanyard with corrosive substances.

When not in use, store equipment where it will not be affected by heat, light, excessive moisture, chemicals, or other degrading elements.

## Inspection

Prior to EACH use, inspect Internal Shock Lanyard for deficiencies, including, but not limited to, corrosion, deformation, pits, burrs, rough surfaces, sharp edges, cracking, rust, paint buildup, excessive heating, alteration, broken stitching, fraying, and missing or illegible labels. IMMEDIATELY remove Internal Shock Lanyard from service if defects or damage are found, or if exposed to forces of fall arrest.

Ensure that applicable work area is free of all damage, including, but not limited to, debris, rot, rust, decay, cracking, and hazardous materials. Ensure that selected work area will support the application-specific minimum loads set forth in this instruction manual. Work area MUST be stable.

At least every 6 months, a Competent Person other than the user must inspect Internal Shock Lanyard.

**Competent Person inspections MUST be recorded in inspection log in instruction manual and on equipment inspection grid label. The Competent Person must sign their initials in the box corresponding to the month and year the inspection took place.**

During inspection, consider all applications and hazards Internal Shock Lanyard have been subjected to.

## Inspection Log

**Date of First Use:** \_\_\_\_\_.

**Product lifetime is indefinite, as long as product passes all inspection requirements. User must inspect prior to EACH use. Competent Person other than user must complete formal inspection at least every 6 months. Competent Person to inspect and initial.**

**This inspection log must be specific to one Internal Shock Lanyard. Separate inspection logs must be used for each Internal Shock Lanyard. All inspection records must be made visible and available to all users at all times.**

	J	F	M	A	M	J	J	A	S	O	N	D
YR												
YR												
YR												
YR												
YR												

**If equipment fails inspection IMMEDIATELY REMOVE FROM SERVICE.**

## Safety Information



Failure to understand and comply with safety regulations may result in serious injury or death. Regulations included herein are not all-inclusive, are for reference only, and are not intended to replace a Competent Person's judgment or knowledge of federal or state standards.

Do not alter equipment. Do not misuse equipment.

Workplace conditions, including, but not limited to, flame, corrosive chemicals, electrical shock, sharp objects, machinery, abrasive substances, weather conditions, and uneven surfaces, must be assessed by a Competent Person before fall protection equipment is selected.

The analysis of the workplace must anticipate where workers will be performing their duties, the routes they will take to reach their work, and the potential and existing fall hazards they may be exposed to. Fall protection equipment must be chosen by a Competent Person. Selections must account for all potential hazardous workplace conditions. All fall protection equipment should be purchased new and in an unused condition.

Fall protection systems must be selected and installed under the supervision of a Competent Person, and used in a compliant manner. Fall protection systems must be designed in a manner compliant with all federal, state, and safety regulations. Forces applied to anchors must be calculated by a Competent Person.

Unless explicitly stated otherwise, the maximum allowable free fall distance for lanyards must not exceed 6'. No free fall allowed for non-LE SRLs. Class A SRLs must arrest falls within 24"; Class B SRLs must arrest falls within 54".

Harnesses and connectors selected must be compliant with manufacturer's instructions, and must be of compatible size and configuration. Snap hooks, carabiners, and other connectors must be selected and applied in a compatible fashion. All risk of disengagement must be eliminated. All snap hooks and carabiners must be self-locking and self-closing, and must never be connected to each other.

A pre-planned rescue procedure in the case of a fall is required. The rescue plan must be project-specific. The rescue plan must allow for employees to rescue themselves, or provide an alternative means for their prompt rescue. Store rescue equipment in an easily accessible and clearly marked area.

Training of Authorized Persons to correctly erect, disassemble, inspect, maintain, store, and use equipment must be provided by a Competent Person. Training must include the ability to recognize fall hazards, minimize the likelihood of fall hazards, and the correct use of personal fall arrest systems.

NEVER use fall protection equipment of any kind to hang, lift, support, or hoist tools or equipment, unless explicitly certified for such use.

Equipment subjected to forces of fall arrest must immediately be removed from use.

Age, fitness, and health conditions can seriously affect the worker should a fall occur. Consult a doctor if there is any reason to doubt a user's ability to withstand and safely absorb fall arrest forces or perform set-up of equipment. Pregnant women and minors must not use this equipment.

Physical harm may still occur even if fall safety equipment functions correctly. Sustained post-fall suspension may result in serious injury or death. Use trauma relief straps to reduce the effects of suspension trauma.

## Labels

For dual-leg models only (located on each leg):

